MINGYI铭毅五金
MINGYI HARDWARE

Hinges
Drawer Slide

















公司简介

COMPANY PROFILE

MINGYI

揭阳市铭毅五金工贸有限公司是一家集研发，生产、销售中高档家具五金的专业制造厂，位于素有“五金之都”美誉的广东省揭阳市蓝城区。主要生产各类中高档液压铰链、不锈钢铰链、角度铰链、不锈钢插销等五金产品。

经过多年得发展和完善，现拥有先进的生产设备，专业的技术人才和经验丰富的员工团队，为高质量的生产提供了强大的技术支持。生产的各种产品“物美价廉、质量可靠”，畅销国内外市场，倍受广大用户的青睐和赞誉。

我厂以“务实、创新、拼搏、超越”为企业精神，以“坦荡做人，踏实做事，积极进取，终生学习”为企业文化：以“卓越品质、锐意创新、诚挚服务、信誉至上”为企业经营理念。竭诚欢迎海内外新老客户来人来涵，洽谈业务，互惠合作！

Jieyang Mingyi Hardware Industry CO.,LTD. is a set of R & D, production and sales in one of the supporting engineering hardware factory. Located in known as the "hardware capital" of Jieyang City, Guangdong Province, convenient transportation and beautiful environment. The main production of various kinds of stainless steel hinge, hinges, hinge, door stopper, flag type stainless steel decorative hardware accessories.

After years of development and improvement, now has advanced production equipment, professional technical personnel and experienced staff team, to provide a strong technical support for the production of high quality. Production of various products' fine workmanship, reliable quality ', best-selling domestic and foreign markets, much of the vast number of users of all ages and praise.

Our factory with "pragmatic, innovative and struggle, beyond the" spirit of enterprise, to "magnanimous man, practical work, positive enterprising, lifelong learning" as the enterprise culture: "innovation, sincere service, the credibility of the first, quality first" business philosophy. Wholeheartedly welcome new and old customers at home and abroad to come and talk, negotiate business, mutual cooperation!

Customer First and Honesty First
客户至上 诚信为本

公司秉承求实、创新的理念和与时俱进的精神，为客户创造价值。通过十余载的努力，创立品牌，树立信誉，赢得了业内及社会各界的广泛认可和赞誉。

The company upholds the spirit of being realistic, innovative and keeping pace with the times to create value for customers. Through more than ten years of efforts to create a brand and establish credibility, has won wide recognition and praise from the industry and the coummnity.




Point-of-sale to the world
远销全球



技术信息 Technical Information

铰链的数量 Quantity Of Hinge

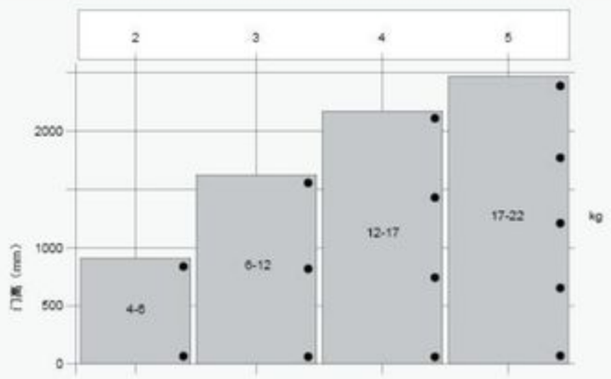


铰链数量取决于门的高度和门的重量。
为保持良好的稳定性，请尽量拉大铰链之间的距离。
负载数据和高度数据对应的是600mm的标准门宽。


The Quantity Of Hinge Depends On The Height And Weignt Of The Door.
To Keep Good Stability, Please Try To Widen The Distance Of Each Hinge
The Data In The Chart Is Based On The Standard 600mm Wide Door.

铰链的型号 Hinge Model

全盖 Full Overlay
直铰臂



半盖 Half Overlay
铰臂 9.5mm 弯曲




内掩 Inset
铰臂 18mm 弯曲




Φ35mm 铰链应用实例：
H= 底座高度
D= 侧板上所需盖位
K= 门板外线与铰杯钻孔距离
A= 门与侧板间隙

Application Of Φ35mm Hinge:
H=Height Of Hinge Base
D=Required Overlay On Side Board
K=Distance Between Door Edge And Drilling Holes On Hinge Cup
A=Gap Between Door And Side Board


铰链的调节 Hinge Adjustment



门的深度调校
Do or depth adjustment




门的左右调校
Do or Left & right adjustment



门的上下调校
Do or up & down adjustment


铰链的固定应用图 Hinge Application Diagram

① 卡式铰链 Clip-On Hinge

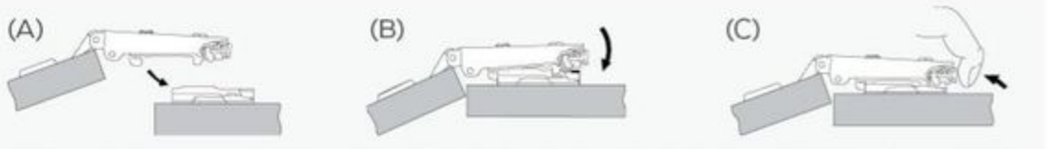


如（A）图所示部分插入底板扣位，后端再倾斜压下如（B）图，即组装完成。拆卸时如（C）图所示，依箭头方向将按钮向内压即可拆卸。
Clamp The Hinge Body To The Hinge Base Shown As Diagram (A), Then Press Down Slopingly The Clip-On Button At The End Of The Hinge Arm To Lock The Hinge Base Shown As Diagram (B), So The Assembling Is Done. Disassemble By Pressing The Clip-On Button Shown As Digram (C).

② 滑入式铰链 Slide-On Hinge

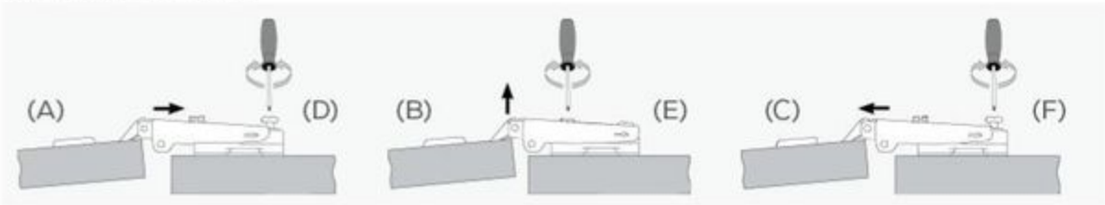


如（A）图所示部分插入底板位置，铰臂与底板配合锁紧螺丝（D），调整调节螺丝（E），获得安装门板所需的盖位如（B）图，即组装完成。拆卸时如（C）图所示，松开螺丝（F）即可拆卸。
Join The Hinge Body To The Hinge Base Shown As Diagram (A), Then Tighten The Locking Screw (D), Then Adjust The Height Of The Adjustment Screw (E), Then Obtain The Required Overlay For Fixing The Door Shown As Diagram (B), So The Assembling Is Done.disassemble By Loosing The Locking Screw (F) Shown As Diagram (C).

③ 固定式铰链 Inseparable Hinge

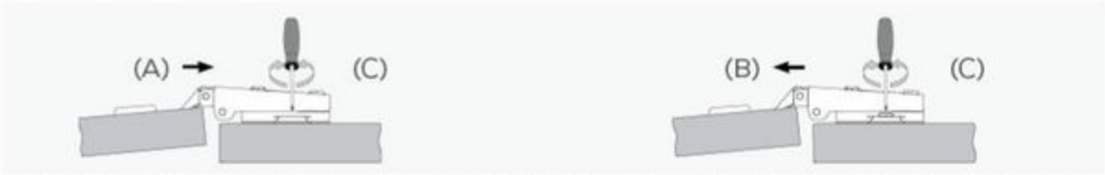

如图（A）所示，将固定连接底座的铰链推入家具侧板，用木牙螺丝将铰链锁紧在侧板上，即安装完成，拆卸时如（B）图所示，松开木牙螺丝即可。
Shown As Diagram (A) And (C), Put The Hinge With Base On The Door Fix The Hinge On The Door With Screws. Then The Assemblmg Is Done. Disassemble It By Loosing Locking Screws. Shown As Diagram (C).

铰杯的固定 Fixing Hinge Cup

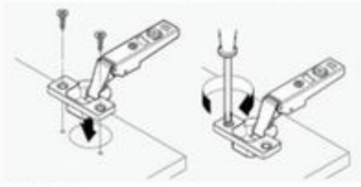


螺丝固定
用 2 个木牙螺丝安装铰杯
Fixing By Screws
Use 2 Chipboard Screw To Fix The Hinge Cup




膨胀螺丝固定
机器压装
Fixing By Expanding Dowel
Use Fixing Machine To Fix The Dowel




螺丝固定
用木牙螺丝固定
By Screw
Use Chipboard Screw To Fix The Base




欧洲螺丝 - 固定
用欧洲螺丝在排孔中固定
By Euro-Screw
Use Euro-Screws To Fix The Base




膨胀胶粒 - 固定
用膨胀胶粒在排孔中机器压装固定
By Expanding Dowel
Use Fixing Machine To Fix The Dowel Into The Hole



无附加载重的耐磨测试 / 疲劳测试
80,000 次开合运动
迷你铰链的 50,000 次开合运动
开启角：关闭至最大开启角负 5°
Fatigue Test Without
Extra Weight 100,000 Circles
50,000 Circles For Mini Hinge
Opening Angle:0°To 5°Less Than The Max Opening Angle



动态负载测试
20Kg 负载，50 次开合运动
开启角：关闭至最大开启角负 10°
Dynamic Load Test
Load:20Kg,50Circles
Opening Angle: 0°To 10° Less Than The Max Opening Angle



意外超压力测试
50N；10 次 5 秒门完全打开
Accidental Overpressure Test
50N; Open The Door Completely For 10 Times In 5 Second


MINGYI

N883 SUS 304

全不锈钢液压铰链 自卸/ All Stainless Steel Hydraulic Hinge Clip-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：高度精抛
  Finish : Highly refined polished
- 主要材质：不锈钢 304 / 201
  Main material : Stainless steel 304/201

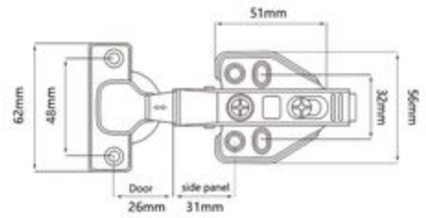

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)





D:盖位计算值表/Table of calculated values of cover level


D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

N881 SUS 304

全不锈钢液压铰链 固定/ All Stainless Steel Hydraulic Hinge Slide-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：高度精抛
  Finish : Highly refined polished
- 主要材质：不锈钢 304 / 201
  Main material : Stainless steel 304/201

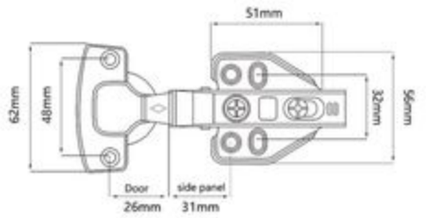

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)





D:盖位计算值表/Table of calculated values of cover level


D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

All 201 N883

全不锈钢液压铰链 自卸/ All Stainless Steel Hydraulic Hinge Clip-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：高度精抛
  Finish : Highly refined polished
- 主要材质：不锈钢 201
  Main material : Stainless steel 201

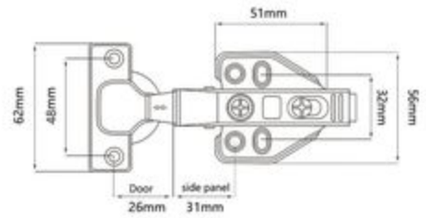

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)





D:盖位计算值表/Table of calculated values of cover level


D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

All 201 N881

全不锈钢液压铰链 固定/ All Stainless Steel Hydraulic Hinge Slide-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：高度精抛
  Finish : Highly refined polished
- 主要材质：不锈钢 201
  Main material : Stainless steel 201

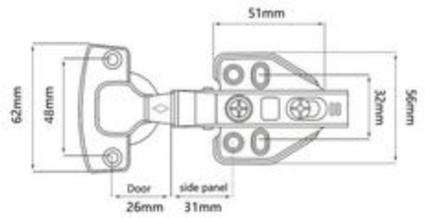

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

1083 2.0mm厚不锈钢液压铰链 自卸
2.0mm Thick Stainless Steel Hydraulic Hinge Clip-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 25-30mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：高度精抛
  Finish : Highly refined polished
- 主要材质：不锈钢 304 / 201
  Main material : Stainless steel 304/201

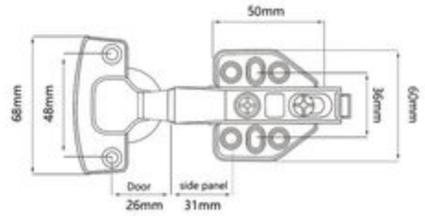

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

1081 2.0mm厚不锈钢液压铰链 固定
2.0mm Thick Stainless Steel Hydraulic Hinge Slide-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：高度精抛
  Finish : Highly refined polished
- 主要材质：不锈钢 304 / 201
  Main material : Stainless steel 304/201

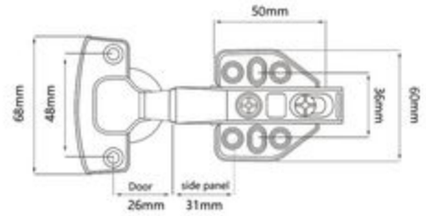

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

4083 40杯不锈钢液压铰链 自卸
40mm Cup Thick door Stainless Steel Hydraulic Hinge Clip-on




- 铰杯直径：40mm / Diameter of hinge cup: 40mm
- 铰杯深度：11.5mm / Cup depth: 11.5mm
- 适用门板厚度：25-30mm / Door thickness : 25-30mm
- 开启角度：95-105° / Opeing angle : 95-105°
- 门板钻孔边距：3-5mm / Door drilling margin : 3-5mm
- 侧板钻孔：37mm / Side plate drilling : 37mm
- 表面处理：高度精抛 / Finish : Highly refined polished
- 主要材质：不锈钢 304 / 201 / Main material : Stainless steel 304/201

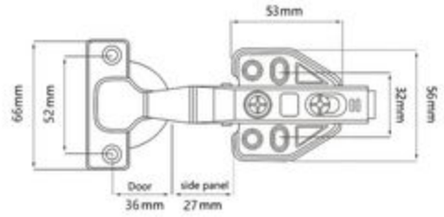

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

4081 40杯厚门不锈钢液压铰链 固定
40mm Cup Thick door Stainless Steel Hydraulic Hinge Slide-on




- 铰杯直径：40mm / Diameter of hinge cup: 40mm
- 铰杯深度：11.5mm / Cup depth: 11.5mm
- 适用门板厚度：16-28mm / Door thickness : 16-28mm
- 开启角度：95-110° / Opeing angle : 95-110°
- 门板钻孔边距：3-5mm / Door drilling margin : 3-5mm
- 侧板钻孔：37mm / Side plate drilling : 37mm
- 表面处理：高度精抛 / Finish : Highly refined polished
- 主要材质：不锈钢304/201 / Main material : Stainless steel 304/201

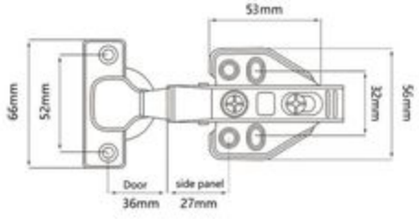

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)





D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

3D863/3D864

不锈钢3D液压铰链 自卸/ Stainless Steel 3D Hydraulic Hinge Clip-on





叠片扣
Iron clip button


合金小鸟扣
Zinc clip button


合金平扣
Zinc flat button


- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：高度精抛
  Finish : Highly refined polished
- 主要材质：不锈钢 304 / 201
  Main material : Stainless steel 304/201

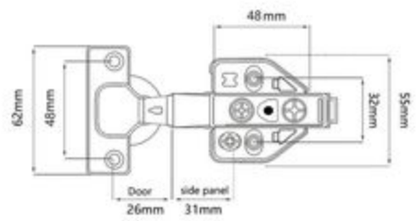

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)





D:盖位计算值表/Table of calculated values of cover level


D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

3D963

3D不锈液压铰链 自卸
3D SS Hydraulic Hinge Clip-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：高度精抛
  Finish : Highly refined polished
- 主要材质：不锈钢 304 / 201
  Main material : Stainless steel 304/201

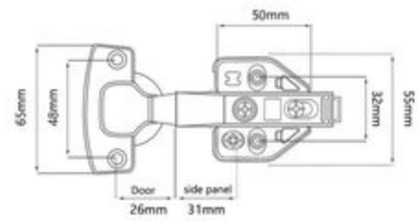

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

N863 新款不锈钢液压铰链 自卸
New Stainless Steel Hydraulic Hinge clip-on




- 铰杯直径：35mm / Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm / Cup depth：11.5mm
- 适用门板厚度：14-22mm / Door thickness : 14-22mm
- 开启角度： 95-105° / Opeing angle : 95-105°
- 门板钻孔边距：3-5mm / Door drilling margin : 3-5mm
- 侧板钻孔：37mm / Side plate drilling : 37mm
- 表面处理：高度精抛 / Finish : Highly refined polished
- 主要材质：不锈钢 304 / 201 / Main material : Stainless steel 304/201

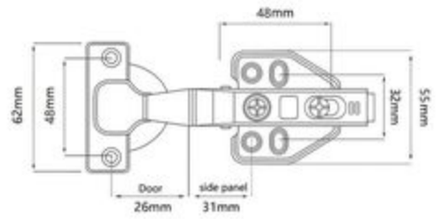

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

N861 新款不锈钢液压铰链 固定
New Stainless Steel Hydraulic Hinge slide-on




- 铰杯直径：35mm / Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm / Cup depth：11.5mm
- 适用门板厚度：14-22mm / Door thickness : 14-22mm
- 开启角度： 95-105° / Opeing angle : 95-105°
- 门板钻孔边距：3-5mm / Door drilling margin : 3-5mm
- 侧板钻孔：37mm / Side plate drilling : 37mm
- 表面处理：高度精抛 / Finish : Highly refined polished
- 主要材质：不锈钢 304 / 201 / Main material : Stainless steel 304/201

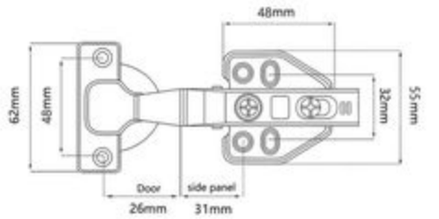

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

N963A 新款不锈钢液压铰链 自卸 New Stainless Steel Hydraulic Hinge Clip-on




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth：11.5mm
- 适用门板厚度：14-22mm Door thickness : 14-22mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：高度精抛 Finish： Highly refined polished
- 主要材质：不锈钢304/201 Main material： Stainless steel 304/201

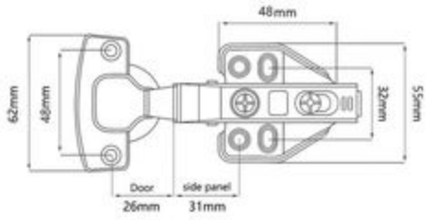

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

N961A 新款不锈钢液压铰链 固定 New Stainless Steel Hydraulic Hinge Slide-on




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth：11.5mm
- 适用门板厚度：14-22mm Door thickness : 14-22mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：高度精抛 Finish： Highly refined polished
- 主要材质：不锈钢304/201 Main material： Stainless steel 304/201

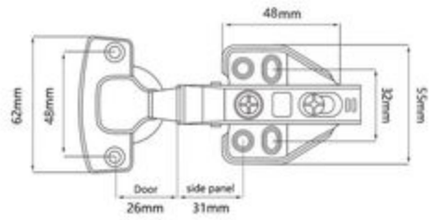

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

N763 新款不锈钢液压铰链 小鸟 自卸
New Stainless Steel Hydraulic Hinge Bird Clip-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth：11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：高度精抛
  Finish： Highly refined polished
- 主要材质：不锈钢304/201
  Main material： Stainless steel 304/201

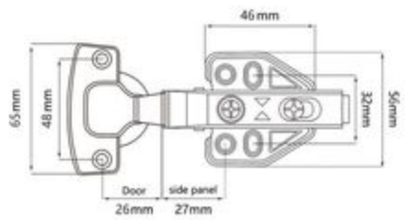

H=底座高度　D=侧板上所需盖位　K=门板外线与铰杯钻孔距离　A=门侧板门缝
H=Height of hinge base　D=Required overlay on side board　K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

N761 新款不锈钢液压铰链 固定
New Stainless Steel Hydraulic Hinge Slide-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth：11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：高度精抛
  Finish： Highly refined polished
- 主要材质：不锈钢304/201
  Main material： Stainless steel 304/201

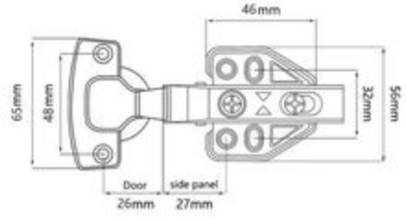

H=底座高度　D=侧板上所需盖位　K=门板外线与铰杯钻孔距离　A=门侧板门缝
H=Height of hinge base　D=Required overlay on side board　K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

DG N963 不锈钢液压带钩铰链（塑料扣/小鸟扣） 自卸
Stainless Steel Hydraulic Hinge With Hook Clip On




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：高度精抛
  Finish : Highly refined polished
- 主要材质：不锈钢201
  Main material : Stainless steel 201

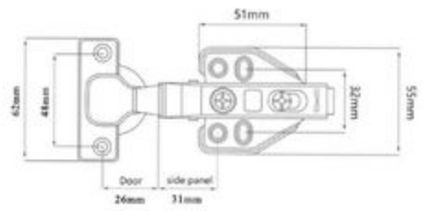

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D / H	3	4	5	6	7
0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)





D:盖位计算值表/Table of calculated values of cover level

D / H	3	4	5	6	7
0	10	11	12	13	14
2	8	9	10	11	12
4					

DG N961 不锈钢液压带钩铰链 固定
Stainless Steel Hydraulic With Hook Slide On




铰杯直径：35mm
Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm

适用门板厚度：14-21mm
Door thickness : 14-21mm
- 开启角度：95-105°
  Opeing angle : 95-105°

门板钻孔边距：3-5mm
Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm

表面处理：高度精抛
Finish : Highly refined polished
- 主要材质：不锈钢201
  Main material : Stainless steel 201

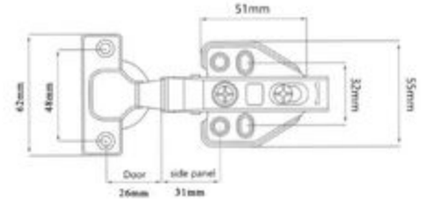

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D / H	3	4	5	6	7
0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D / H	3	4	5	6	7
0	10	11	12	13	14
2	8	9	10	11	12
4					



363 不锈钢非液压铰链 固定 Stainless Steel Non-Hydraulic Hinge clip-on


- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth: 11.5mm
- 适用门板厚度：14-22mm Door thickness : 14-22mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：高度精抛 Finish : Highly refined polished
- 主要材质：不锈钢304/201 Main material : Stainless steel 304/201

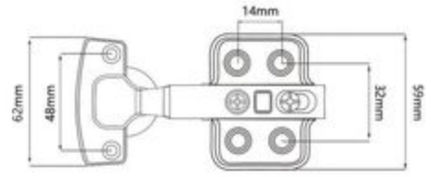

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)





D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					



3D63/3D64


铁 3D 液压铰链 自卸/ Iron 3D Hydraulic Hinge Clip-on

- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth: 11.5mm
- 适用门板厚度：14-22mm Door thickness : 14-22mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：双层镀镍 Finish : Double Nickel finished
- 主要材质：铁 Main material : Iron


叠片扣
Iron clip button


合金小鸟扣
Zinc clip button



合金平扣
Zinc flat button

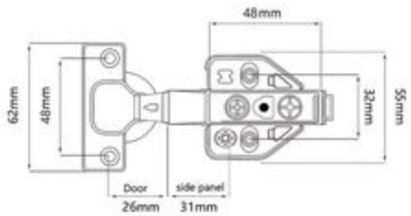

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)





D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

DG3D63

铁3D液压带钩铰链 自卸 / Iron 3D Hydraulic With Hook Hinge Clip On




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：高度精抛
  Finish : Highly refined polished
- 主要材质：铁
  Main material : Iron

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)





D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

3D63 With 6 Holes

铁 3D 液压铰链 自卸/ Iron 3D Hydraulic Hinge Clip-on (6 Holes)




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：双层镀镍
  Finish : Double Nickel finished
- 主要材质：铁
  Main material : Iron



叠片扣
Iron clip button




合金平扣
Zinc flat button

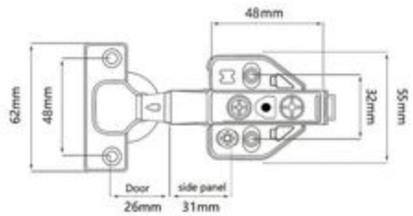

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

4063 40mm铁液压铰链合金 自卸
40mm Cup Iron Hydraulic Hinge Alloy Clip-on




- 铰杯直径：40mm
  Diameter of hinge cup: 40mm
- 铰杯深度：11.5mm
  Cup depth：11.5mm
- 适用门板厚度：25-30mm
  Door thickness：25-30mm
- 开启角度：95-105°
  Opeing angle：95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin：3-5mm
- 侧板钻孔：37mm
  Side plate drilling：37mm
- 表面处理：双层镀镍
  Finish： Double Nickel finished
- 主要材质：铁
  Main material： Iron

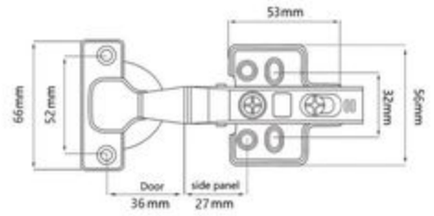

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D / H	K 3	4	5	6	7
0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D / H	K 3	4	5	6	7
0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D / H	K 3	4	5	6	7
0	-2.5	-1.5	-0.5		
2					
4					

4061 40mm 铁液压铰链 固定
40mm Cup Iron Hydraulic Hinge side-on




- 铰杯直径：40mm
  Diameter of hinge cup: 40mm
- 铰杯深度：11.5mm
  Cup depth：11.5mm
- 适用门板厚度：25-30mm
  Door thickness：25-30mm
- 开启角度：95-105°
  Opeing angle：95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin：3-5mm
- 侧板钻孔：37mm
  Side plate drilling：37mm
- 表面处理：双层镀镍
  Finish： Double Nickel finished
- 主要材质：铁
  Main material： Iron

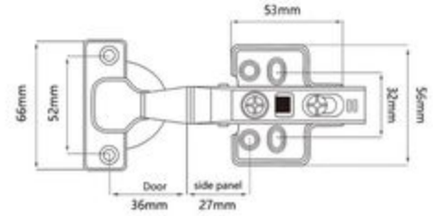

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D / H	K 3	4	5	6	7
0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D / H	K 3	4	5	6	7
0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D / H	K 3	4	5	6	7
0	-2.5	-1.5	-0.5		
2					
4					

N6263S 新款铁液压铰链 自卸 New Iron Hydraulic Hinge clip-on




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth: 11.5mm
- 适用门板厚度：14-22mm Door thickness : 14-22mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：双层镀镍 Finish : Double Nickel finished
- 主要材质：铁 Main material : Iron

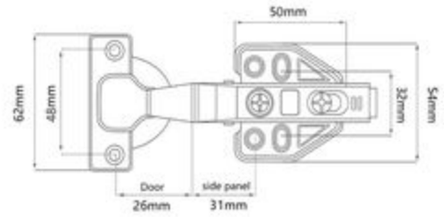

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

H \ D	3	4	5	6	7
0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

H \ D	3	4	5	6	7
0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

H \ D	3	4	5	6	7
0	-2.5	-1.5	-0.5		
2					
4					

N6261S 新款铁液压铰链 固定 New Iron Hydraulic Hinge slide-on




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth: 11.5mm
- 适用门板厚度：14-22mm Door thickness : 14-22mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：双层镀镍 Finish : Double Nickel finished
- 主要材质：铁 Main material : Iron

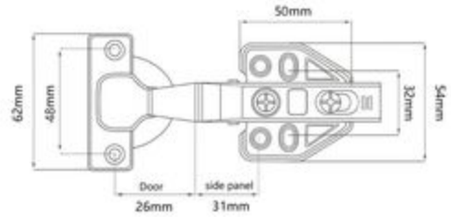

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

H \ D	3	4	5	6	7
0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

H \ D	3	4	5	6	7
0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

H \ D	3	4	5	6	7
0	-2.5	-1.5	-0.5		
2					
4					

N6263 新款铁液压铰链 自卸
New Iron Hydraulic Hinge clip-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：双层镀镍
  Finish : Double Nickel finished
- 主要材质：铁
  Main material : Iron

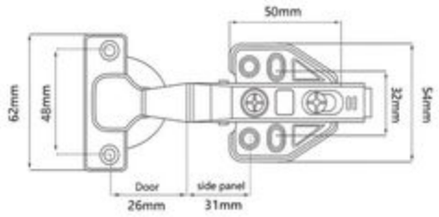

H=底座高度　D=侧板上所需盖位　K=门板外线与铰杯钻孔距离　A=门侧板门缝
H=Height of hinge base　D=Required overlay on side board　K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

N6261 新款铁液压铰链 固定
New Iron Hydraulic Hinge slide-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：双层镀镍
  Finish : Double Nickel finished
- 主要材质：铁
  Main material : Iron

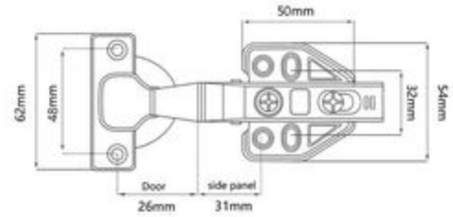

H=底座高度　D=侧板上所需盖位　K=门板外线与铰杯钻孔距离　A=门侧板门缝
H=Height of hinge base　D=Required overlay on side board　K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

6553 铁液压铰链 自卸 Iron Hydraulic Clip-on hinge




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth：11.5mm
- 适用门板厚度：14-22mm Door thickness : 14-22mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：双层镀镍 Finish: Double Nickel Finished
- 主要材质：铁 Main material : Iron

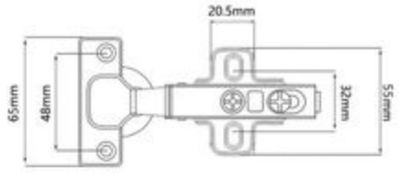

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

H561 铁液压铰链滑入式 Iron Hydraulic hinge with slide-on plate




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth：11.5mm
- 适用门板厚度：14-22mm Door thickness : 14-22mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：双层镀镍 Finish : Doubel Nickel finished
- 主要材质：铁 Main material : Iron

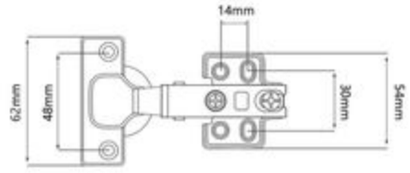

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

6264 铁液压铰链平扣合金 自卸
Iron Hydraulic Hinge With Alloy Clip-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-21mm
  Door thickness : 14-21mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：镀镍
  Finish : Nickel finished
- 主要材质：铁
  Main material : Iron

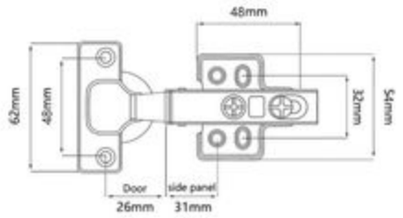

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

6264E 铁液压铰链配欧式螺丝
Hydraulic Hinge With European Screw




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：镀镍
  Finish : Nickel finished
- 主要材质：铁
  Main material : Iron

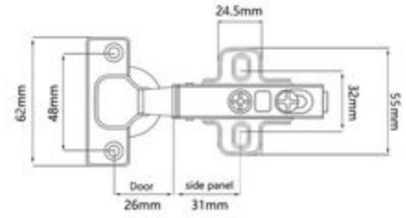

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

DG 6264 铁液压铰链带钩 自卸
Iron Hydraulic Hinge With Hook Clip On




- 铰杯直径：35mm / Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm / Cup depth: 11.5mm
- 适用门板厚度：14-21mm / Door thickness : 14-21mm
- 开启角度：95-105° / Opeing angle : 95-105°
- 门板钻孔边距：3-5mm / Door drilling margin : 3-5mm
- 侧板钻孔：37mm / Side plate drilling : 37mm
- 表面处理：镀镍 / Finish : Nickel finished
- 主要材质：铁 / Main material : Iron

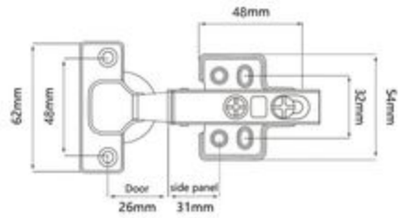

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

DG 6261 铁液压铰链带钩 固定
Hydraulic Hinge With Hook Slide On




- 铰杯直径：35mm / Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm / Cup depth: 11.5mm
- 适用门板厚度：14-22mm / Door thickness : 14-22mm
- 开启角度：95-105° / Opeing angle : 95-105°
- 门板钻孔边距：3-5mm / Door drilling margin : 3-5mm
- 侧板钻孔：37mm / Side plate drilling : 37mm
- 表面处理：镀镍 / Finish : Nickel finished
- 主要材质：铁 / Main material : Iron

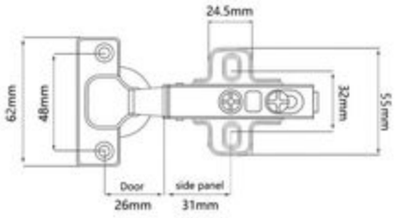

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

6263 铁液压铰链 自卸 Iron Hydraulic Hinge Clip-on




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth: 11.5mm
- 适用门板厚度：14-22mm Door thickness : 14-22mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：镀镍 Finish : Nickel finished
- 主要材质：铁 Main material : Iron

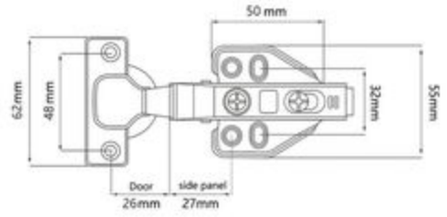

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

6261 铁液压铰链 固定 Iron Hydraulic Hinge Slide-on




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth: 11.5mm
- 适用门板厚度：14-21mm Door thickness : 14-21mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：镀镍 Finish : Nickel finished
- 主要材质：铁 Main material : Iron

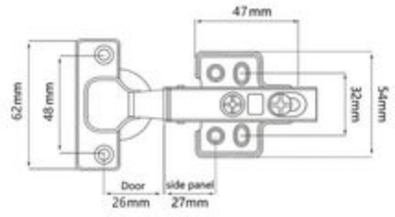

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

563 铁液压铰链 自卸 Iron Hydraulic Hinge Clip-on




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth: 11.5mm
- 适用门板厚度：14-22mm Door thickness : 14-22mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：镀镍 Finish : Nickel finished
- 主要材质：铁 Main material : Iron

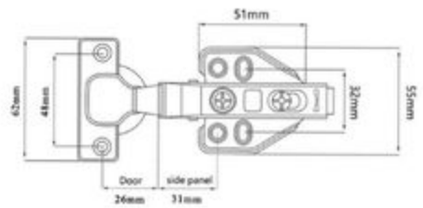

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

561 铁液压铰链 固定 Iron Hydraulic Hinge Slide-on




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth: 11.5mm
- 适用门板厚度：14-21mm Door thickness : 14-21mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：镀镍 Finish : Nickel finished
- 主要材质：铁 Main material : Iron

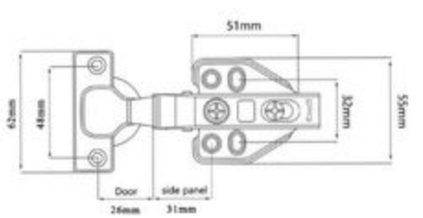

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

XL513 铁零角度塑料液压铰链 自卸
Iron 0 Degree Plastic Hydraulic Hinge Clip-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：双层镀镍
  Finish : Doubel Nickel finished
- 主要材质：铁
  Main material : Iron

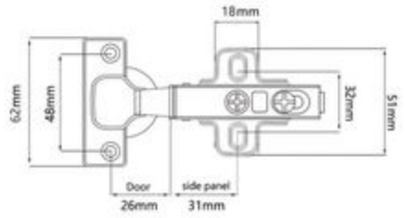

H=底座高度　D=侧板上所需盖位　K=门板外线与铰杯钻孔距离　A=门侧板门缝
H=Height of hinge base　D=Required overlay on side board　K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

XL511 铁零角度塑料液压铰链 固定
Iron 0 Degree Plastic Hydraulic Hinge Slide-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-22mm
  Door thickness : 14-22mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：双层镀镍
  Finish : Doubel Nickel finished
- 主要材质：铁
  Main material : Iron

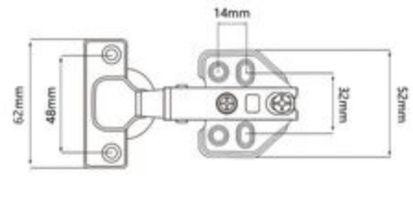

H=底座高度　D=侧板上所需盖位　K=门板外线与铰杯钻孔距离　A=门侧板门缝
H=Height of hinge base　D=Required overlay on side board　K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

F261S 铁液压铰链 固定 Iron Hydraulic Hinge Slide-on




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth: 11.5mm
- 适用门板厚度：14-22mm Door thickness : 14-22mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：双层镀镍 Finish : Doubel Nickel finished
- 主要材质：铁 Main material : Iron

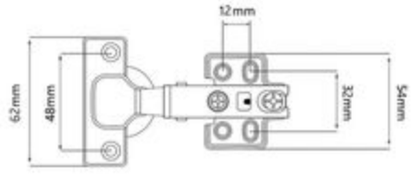

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D / H	K 3	4	5	6	7
0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D / H	K 3	4	5	6	7
0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D / H	K 3	4	5	6	7
0	-2.5	-1.5	-0.5		
2					
4					

F261 铁液压铰链 固定 Iron Hydraulic Hinge Slide-on




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：10.5mm Cup depth: 10.5mm
- 适用门板厚度：14-20mm Door thickness : 14-20mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：镀镍 Finish : Nickel finished
- 主要材质：铁 Main material : Iron

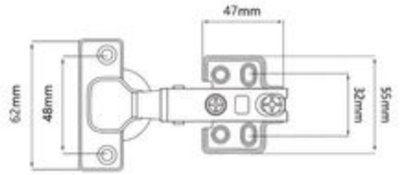

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D / H	K 3	4	5	6	7
0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D / H	K 3	4	5	6	7
0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D / H	K 3	4	5	6	7
0	-2.5	-1.5	-0.5		
2					
4					

H265 经济铁液压铰链 固定 Economic Iron Hydraulic Hinge Slide-on




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：9.5mm Cup depth: 9.5mm
- 适用门板厚度：14-16mm Door thickness : 14-16mm
- 开启角度：93-100° Opeing angle : 93-100°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：镀镍 Finish : Nickel finished
- 主要材质：铁 Main material : Iron

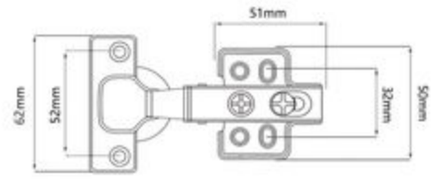

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

A8 铁普通铰链 Iron Ordinary Hinge Slide-on




- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm Cup depth: 11.5mm
- 适用门板厚度：14-22mm Door thickness : 14-22mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：镀镍 Finish : Nickel finished
- 主要材质：铁 Main material : Iron

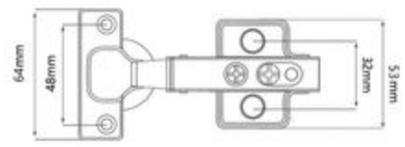

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

261 普通一段力 & 两段力铰链
Iron Ordinary One way/Two way Hinge Slide-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-18mm
  Door thickness : 14-18mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：镀镍
  Finish : Nickel finished
- 主要材质：铁
  Main material : Iron

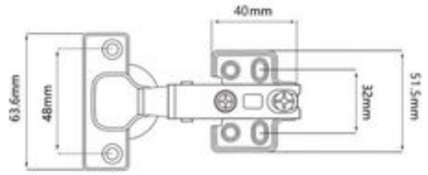

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

261E 普通一段力/二段力铰链配欧式螺丝
Iron Normal One way/Two way Hinge With Euro Screw Slide-on




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-18mm
  Door thickness : 14-18mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：镀镍
  Finish : Nickel finished
- 主要材质：铁
  Main material : Iron

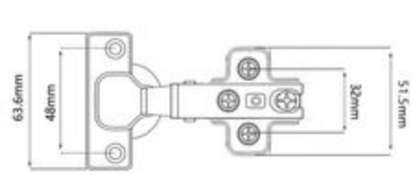

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

6802 三钉一段力铰链 2孔 4孔
Three Nails.One Way Hinge.Two Holes/Four Holes




- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth: 11.5mm
- 适用门板厚度：14-21mm
  Door thickness : 14-21mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：镀镍
  Finish : Nickel finished
- 主要材质：铁
  Main material : Iron

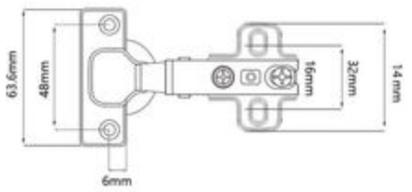

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

268 26 杯迷你一段力铰链 固定
26mm one Way Hinge Slide-on




- 铰杯直径：26mm
  Diameter of hinge cup: 26mm
- 铰杯深度：10.5mm
  Cup depth: 10.5mm
- 适用门板厚度：14-18mm
  Door thickness : 14-18mm
- 开启角度：95-105°
  Opeing angle : 95-105°
- 门板钻孔边距：3-5mm
  Door drilling margin : 3-5mm
- 侧板钻孔：37mm
  Side plate drilling : 37mm
- 表面处理：镀镍
  Finish : Nickel finished
- 主要材质：铁
  Main material : Iron

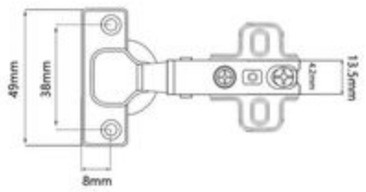

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)






D:盖位计算值表/Table of calculated values of cover level

D \ K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

261F 铁反弹铰链 Iron Rebound Hinge




- 铰杯直径：35mm / Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm / Cup depth: 11.5mm
- 适用门板厚度：14-21mm / Door thickness : 14-21mm
- 开启角度：95-105° / Opeing angle : 95-105°
- 门板钻孔边距：3-5mm / Door drilling margin : 3-5mm
- 侧板钻孔：37mm / Side plate drilling : 37mm
- 表面处理：镀镍 / Finish : Nickel finished
- 主要材质：铁 / Main material : Iron

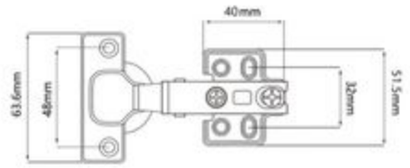

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board

直臂
(Full overlay)






D:盖位计算值表/Table of calculated values of cover level

D / K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					

中弯
(Half overlay)






D:盖位计算值表/Table of calculated values of cover level

D / K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					

大弯
(Insert)





D:盖位计算值表/Table of calculated values of cover level

D / K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					

3D 45° 液压铰链 Hydraulic Hinge of Degrees



3D 90° 液压铰链 Hydraulic Hinge of Degrees



3D 165° 液压铰链 Hydraulic Hinge of Degrees







L13 铝框液压铰链 固定
Aluminum Frame hydraulic Hinge Slide-on

- 适用铝门厚度：16-20mm
  Door thickness : 16-20mm
- 开启角度：90°
  Opeing angle : 90°
- 表面处理：顺德三层电镀
  Finish : Shunde three - layer plating
- 主要材质：铁
  Main material : Iron



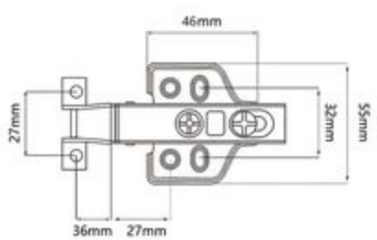



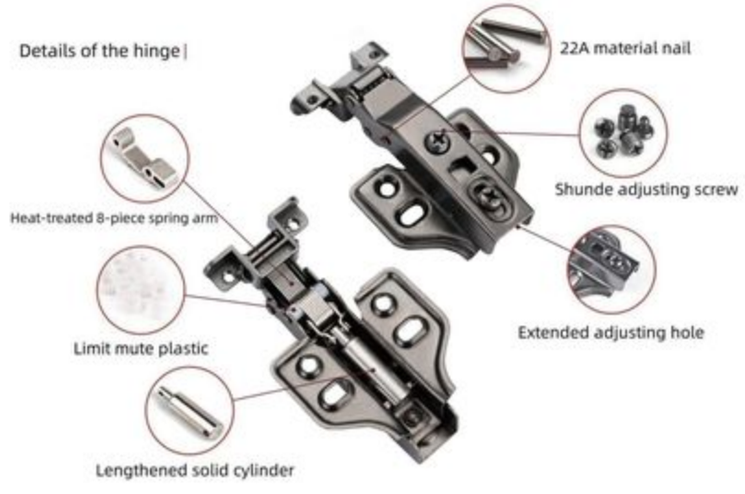




L3D 3D铝框液压铰链 自卸
3D Aluminum Frame hydraulic Hinge Clip-on

- 适用铝门厚度：16-20mm
  Door thickness : 16-20mm
- 开启角度：90°
  Opeing angle : 90°
- 表面处理：顺德三层电镀
  Finish : Shunde three - layer plating
- 主要材质：铁
  Main material : Iron



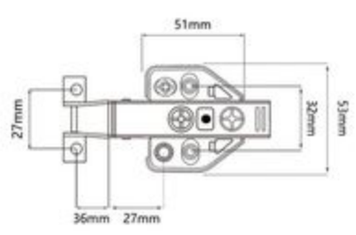



Aluminum frame glass door supporting hardware

Corner code

Specification: 45x 16mm
Thickness:1.5-2.0-2.2mm




Screw

Shape: Hexagon/Crosshead
Color: Black/Silver






青蛙 青蛙铰链（3寸） Frog Hinge（3 Inch）

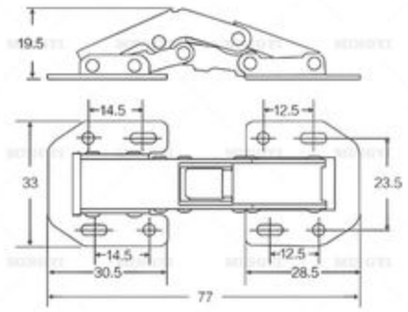




青蛙 青蛙铰链（4寸） Frog Hinge（4Inch）

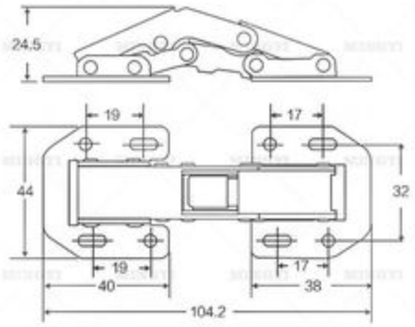




青蛙 青蛙铰链（液压） Frog Hinge（Hydraulic）

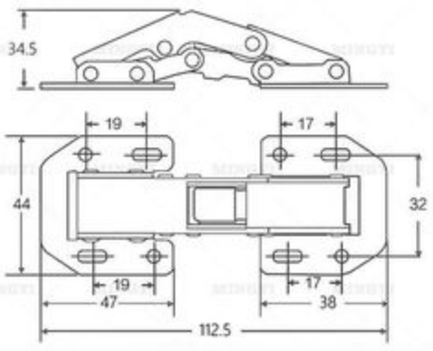



808 带垫片液压铰链 Iron Hydraulic Hinge With Rubber

- 铰杯直径：35mm Diameter of hinge cup: 35mm
- 铰杯深度：10.5mm Cup depth: 10.5mm
- 适用门板厚度：14-18mm Door thickness : 14-18mm
- 开启角度：95-105° Opeing angle : 95-105°
- 门板钻孔边距：3-5mm Door drilling margin : 3-5mm
- 侧板钻孔：37mm Side plate drilling : 37mm
- 表面处理：镀镍 Finish : Nickel finished
- 主要材质：铁 Main material : Iron

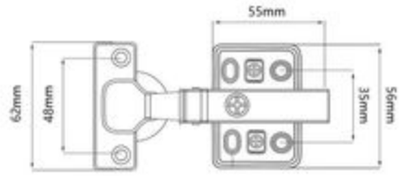

H=底座高度 D=侧板上所需盖位 K=门板外线与铰杯钻孔距离 A=门侧板门缝
H=Height of hinge base D=Required overlay on side board K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board



Full overlay(Without rubber)

D:盖位计算值表/Table of calculated values of cover level

D / H \ K	3	4	5	6	7
0	18	19	20	21	22
2	16	17	18	19	20
4					



Half overlay(With one rubber)

D:盖位计算值表/Table of calculated values of cover level

D / H \ K	3	4	5	6	7
0	10	11	12	13	14
2	8	9	10	11	12
4					



Insert(With two rubbers)


D:盖位计算值表/Table of calculated values of cover level

D / H \ K	3	4	5	6	7
0	-2.5	-1.5	-0.5		
2					
4					

165° 165度普通/液压铰链
Iron 165 Degree Ordinary/Hydraulic Hinge



- 铰杯直径：35mm
  Diameter of hinge cup: 35mm
- 铰杯深度：11.5mm
  Cup depth：11.5mm
- 适用门板厚度：14-21mm
  Door thickness：14-21mm
- 开启角度：165°
  Opeing angle：165°
- 门板钻孔边距：3-5mm
  Door drilling margin：3-5mm
- 侧板钻孔：37mm
  Side plate drilling：37mm
- 表面处理：镀镍
  Finish：Nickel finished
- 主要材质：铁
  Main material：Iron

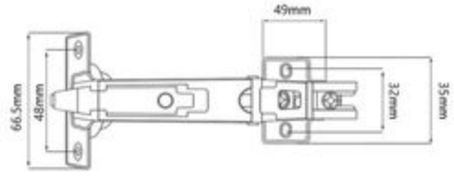

H=底座高度　D=侧板上所需盖位　K=门板外线与铰杯钻孔距离　A=门侧板门缝
H=Height of hinge base　D=Required overlay on side board　K=Distance between door edge and drilling holes on hinge cup
A=Gap between door and side board



165°
(Normal)

D:盖位计算值表/Table of calculated values of cover level

D / K	3	4	5	6	7
H 0	18	19	20	21	22
2	16	17	18	19	20
4					



165°
(Hydraulic-slide-on)

D:盖位计算值表/Table of calculated values of cover level

D / K	3	4	5	6	7
H 0	10	11	12	13	14
2	8	9	10	11	12
4					




165°
(Hydraulic-clip-on)

D:盖位计算值表/Table of calculated values of cover level


D / K	3	4	5	6	7
H 0	-2.5	-1.5	-0.5		
2					
4					



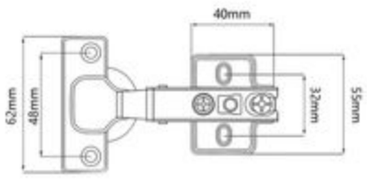


30° 铰链
Hinges of Different Degrees



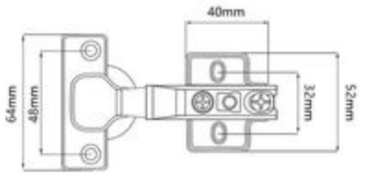


45° 铰链
Hinges of Different Degrees



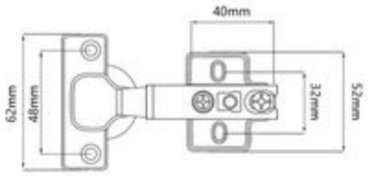


90° 铰链
Hinges of Different Degrees



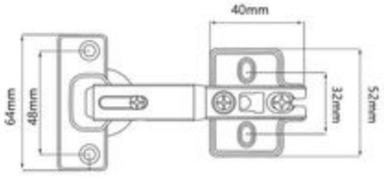


135° 铰链
Hinges of Different Degrees

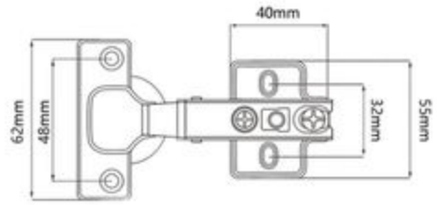




45° 液压铰链 固定
Hydraulic of degrees Slide on

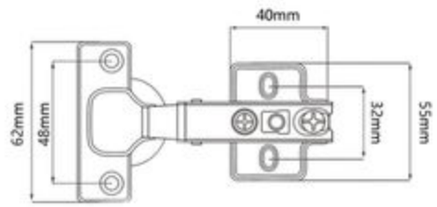




90° 液压铰链 固定
Hydraulic of degrees Slide on

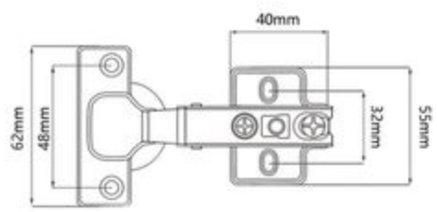




30° 液压铰链 自卸
Hydraulic of degrees clip on

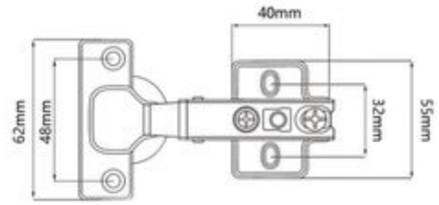




45° 液压铰链 自卸
Hydraulic of degrees clip on

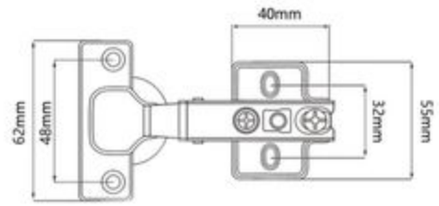




90° 液压铰链 自卸
Hydraulic of degrees clip on






短臂 铰链
Short Arm Hinge






SH822
不锈钢液压短臂铰链
Stainless SteelHydraulic Short Arm Hinge



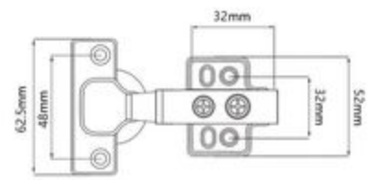


SS811
不锈钢非液压短臂铰链
Stainless Steel Non-Hydraulic Short Arm Hinge






短臂 铁液压短臂铰链
Iron Hydraulic Short Arm Hinge



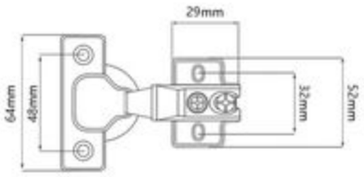


短臂 铁非液压短臂铰链
Iron Non-Hydraulic Short Arm Hinge



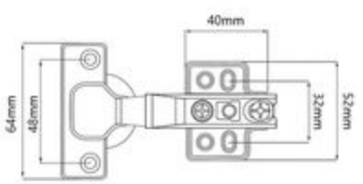


-30° 铰链
Degrees Hinge



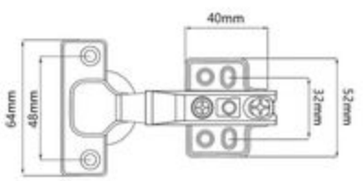

-45° 铰链
Degrees Hinge





Glass hinge
玻璃非液压铰链 固定
Glass Non-hydraulic Hinge Slide-on


30MM 铁普通三节钢珠滑轨
Iron Ordinary 3-fold Ball Bearing Drawer Slide


- 滑轨宽度：30mm
  Width: 30mm
- 滑轨长度：190-450mm
  Length: 190-450mm
- 材料厚度：0.55&0.7mm
  Material thickness：0.55&0.7mm
- 额定负重：15KG
  Load capacity: 15KG
- 使用寿命：50000
  Cycling: 50000
- 安装方式：侧面安装
  Installation: Side mount
- 表面处理：镀蓝锌/镀黑
  Finish：Blue Zinc-plated/ Black
- 主要材质：冷轧钢
  Main material：Cold-rolled steel plate


耐高温/低温塑料
High Temperature/Low Temperature Resistance Plastics


高级钢珠
High Quality Steel Ball



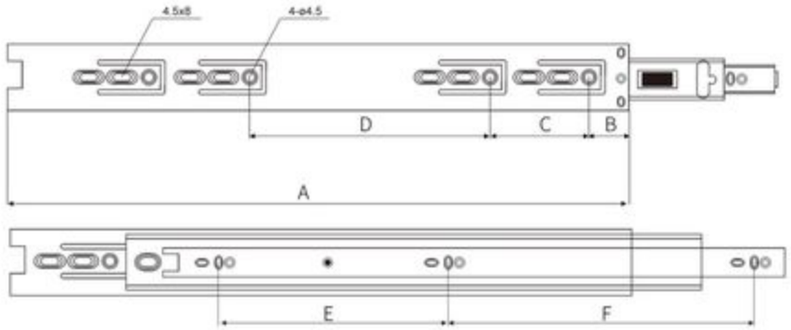



MY-30MM 三折钢珠滑轨
3-fold Full Extension Ball Bearing Slide
单位: mm
unit: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8 Inch	190	35	96			128		
10寸 10 Inch	250	35	64	96	96	64		
12寸 12 Inch	300	35	64	64	128	96		
14寸 14 Inch	350	35	64	96	128	128		
16寸 16 Inch	400	35	64	160	160	160		
18寸 18 Inch	450	35	64	96	192	160		

材料厚度 Thickness Range

NO.	❶ ❷ ❸
A	0.55x0.55x0.55mm
B	0.7x0.7x0.7mm
C	0.55x0.55x0.55mm


35MM 铁普通三节钢珠滑轨
Iron Ordinary 3-fold Ball Bearing Drawer Slide


- 滑轨宽度：35mm
  Width: 35mm
- 滑轨长度：190-450mm
  Length: 190-450mm
- 材料厚度：0.6-09mm
  Material thickness：0.6-0.9mm
- 额定负重：20KG
  Load capacity: 20KG
- 使用寿命：50000
  Cycling: 50000
- 安装方式：侧面安装
  Installation: Side mount
- 表面处理：镀蓝锌/镀黑
  Finish：Blue Zinc-plated/ Black
- 主要材质：冷轧钢
  Main material：Cold-rolled steel plate


耐高温/低温塑料
High Temperature/Low Temperature Resistance Plastics


高级钢珠
High Quality Steel Ball



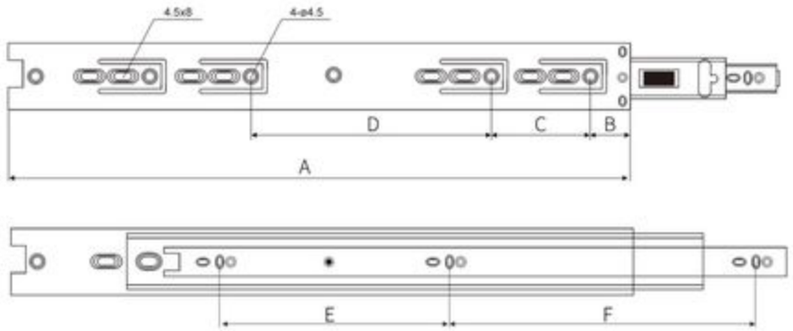



MY-35MM 三折钢珠滑轨
3-fold Full Extension Ball Bearing Slide
单位: mm
unit: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8 Inch	190	35	96			128		
10寸 10 Inch	250	35	64	96	96	64		
12寸 12 Inch	300	35	64	64	128	96		
14寸 14 Inch	350	35	64	96	128	128		
16寸 16 Inch	400	35	64	160	160	160		
18寸 18 Inch	450	35	64	96	192	160		

材料厚度 Thickness Range

NO.	❶ ❷ ❸
A	0.6x0.6x0.6mm
B	0.65x0.65x0.65mm
C	0.7x0.7x0.7mm
D	0.8x0.8x0.8mm
E	0.9x0.9x0.9mm


40MM 铁普通三节钢珠滑轨 Iron Ordinary 3-fold Ball Bearing Drawer Slide


- 滑轨宽度：40mm Width: 40mm
- 滑轨长度：190-600mm Length: 190-600mm
- 材料厚度：0.55-0.7mm Material thickness：0.55-0.7mm
- 额定负重：20KG Load capacity: 20KG
- 使用寿命：50000 Cycling: 50000
- 安装方式：侧面安装 Installation: Side mount
- 表面处理：镀蓝锌/镀黑 Finish：Blue Zinc-plated/ Black
- 主要材质：冷轧钢 Main material：Cold-rolled steel plate



耐高温/低温塑料
High Temperature/Low Temperature Resistance Plastics


高级钢珠
High Quality Steel Ball



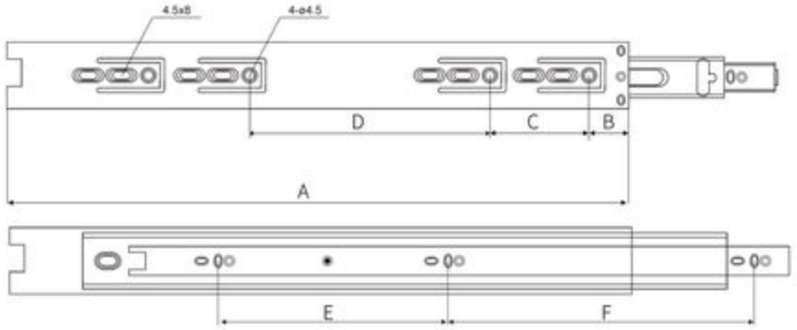





MY-40MM 三折钢珠滑轨
3-fold Full Extension Ball Bearing Slide
单位: mm
unit: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8 Inch	190	35	96			128		
10寸 10 Inch	250	35	64	96	96	64		
12寸 12 Inch	300	35	64	64	128	96		
14寸 14 Inch	350	35	64	96	128	128		
16寸 16 Inch	400	35	64	160	160	160		
18寸 18 Inch	450	35	64	96	192	160		
20寸 20 Inch	500	35	64	128	224	192		
22寸 22 Inch	550	35	64	160	224	224		
24寸 24 Inch	600	35	64	192	256	256		

材料厚度 Thickness Range

NO.	❶ ❷ ❸
A	0.55x0.55x0.55mm
B	0.6x0.6x0.6mm
C	0.7x0.7x0.7mm


42MM 铁普通三节钢珠滑轨 Iron Ordinary 3-fold Ball Bearing Drawer Slide


- 滑轨宽度：42mm Width: 42mm
- 滑轨长度：190-650mm Length: 190-650mm
- 材料厚度：0.7-0.9mm Material thickness：0.7-0.9mm
- 额定负重：25KG Load capacity: 25KG
- 使用寿命：50000 Cycling: 50000
- 安装方式：侧面安装 Installation: Side mount
- 表面处理：镀蓝锌/镀黑 Finish：Blue Zinc-plated/ Black
- 主要材质：冷轧钢 Main material：Cold-rolled steel plate



耐高温/低温塑料
High Temperature/Low Temperature Resistance Plastics


高级钢珠
High Quality Steel Ball



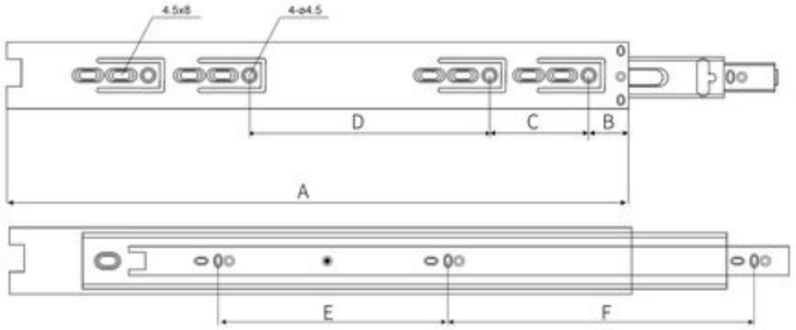





MY-42MM 三折钢珠滑轨
3-fold Full Extension Ball Bearing Slide
单位: mm
unit: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8 Inch	190	35	96			128		
10寸 10 Inch	250	35	64	96	96	64		
12寸 12 Inch	300	35	64	64	128	96		
14寸 14 Inch	350	35	64	96	128	128		
16寸 16 Inch	400	35	64	160	160	160		
18寸 18 Inch	450	35	64	96	192	160		
20寸 20 Inch	500	35	64	128	224	192		
22寸 22 Inch	550	35	64	160	224	224		
24寸 24 Inch	600	35	64	192	256	256		
26寸 26 Inch	650	35	64	224	256	288		

材料厚度 Thickness Range

NO.	❶ ❷ ❸
A	0.7x0.7x0.7mm
B	0.8x0.8x0.8mm
C	0.9x0.9x0.9mm


45MM 铁普通三节钢珠滑轨
Iron Ordinary 3-fold Ball Bearing Drawer Slide


- 滑轨宽度：45mm
  Width: 45mm
- 滑轨长度：190-650mm
  Length: 190-650mm
- 材料厚度：0.8-1.5mm
  Material thickness：0.8-1.5mm
- 额定负重：30-45KG
  Load capacity: 30-45KG
- 使用寿命：50000
  Cycling: 50000
- 安装方式：侧面安装
  Installation: Side mount
- 表面处理：镀蓝锌/镀黑
  Finish：Blue Zinc-plated/ Black
- 主要材质：冷轧钢
  Main material：Cold-rolled steel plate


耐高温/低温塑料
High Temperature/Low Temperature Resistance Plastics


高级钢珠
High Quality Steel Ball



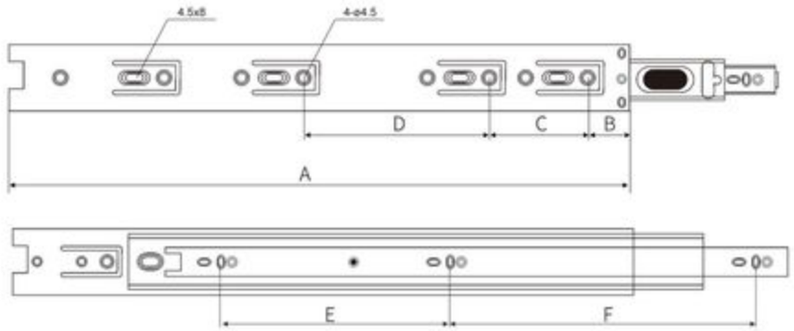



MY-45MM 三折钢珠滑轨
3-fold Full Extension Ball Bearing Slide
单位: mm
unit: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8 Inch	190	35	96			128		
10寸 10 Inch	250	35	64	96	96	64		
12寸 12 Inch	300	35	64	64	128	96		
14寸 14 Inch	350	35	64	96	128	128		
16寸 16 Inch	400	35	64	160	160	160		
18寸 18 Inch	450	35	64	96	192	160		
20寸 20 Inch	500	35	64	128	224	192		
22寸 22 Inch	550	35	64	160	224	224		
24寸 24 Inch	600	35	64	192	256	256		
26寸 26 Inch	650	35	64	224	256	288		

材料厚度 Thickness Range

NO.	❶ ❷ ❸
A	0.8x0.8x0.8mm
B	0.9x0.9x0.9mm
C	1.0x1.0x1.0mm
D	1.0x1.0x1.2mm
E	1.2x1.2x1.2mm
F	1.2x1.2x1.5mm


45MM 铁缓冲/自弹三节钢珠滑轨
Iron Soft Close/Push Open 3-Fold Ball Bearing Drawer Slide


- 滑轨宽度：45mm
  Width: 45mm
- 滑轨长度：190-650mm
  Length: 190-650mm
- 材料厚度：0.9-1.2mm
  Material thickness：0.9-1.2mm
- 额定负重：30-45KG
  Load capacity: 30-45KG
- 使用寿命：50000
  Cycling: 50000
- 安装方式：侧面安装
  Installation: Side mount
- 表面处理：镀蓝锌/镀黑
  Finish：Blue Zinc-plated/ Black
- 主要材质：冷轧钢
  Main material：Cold-rolled steel plate


阻尼缓冲装置
Damping Soft-closing Device


高级钢珠
High Quality Steel Ball



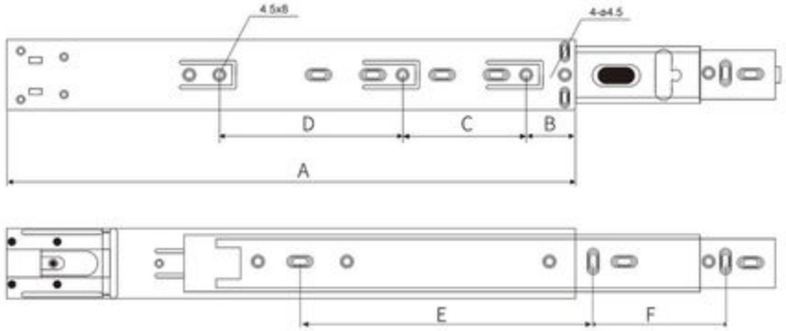



MY-45MM 三折钢珠滑轨
3-fold Full Extension Ball Bearing Slide
单位: mm
unit: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8 Inch	190	35	96			128		
10寸 10 Inch	250	35	64	96	96	64		
12寸 12 Inch	300	35	64	64	128	96		
14寸 14 Inch	350	35	64	96	128	128		
16寸 16 Inch	400	35	64	160	160	160		
18寸 18 Inch	450	35	64	96	192	160		
20寸 20 Inch	500	35	64	128	224	192		
22寸 22 Inch	550	35	64	160	224	224		
24寸 24 Inch	600	35	64	192	256	256		
26寸 26 Inch	650	35	64	224	256	288		

材料厚度 Thickness Range

NO.	❶ ❷ ❸
A	0.9x0.9x0.9mm
B	1.0x1.0x1.0mm
C	1.1x1.1x1.1mm
D	1.2x1.2x1.2mm


45MM 不锈钢三节钢珠滑轨
Stainless steel 3-fold Ball Bearing Drawer Slide


- 滑轨宽度：45mm / Width: 45mm
- 滑轨长度：200-650mm / Length: 200-650mm
- 材料厚度：0.8-1.5mm / Material thickness：0.8-1.5mm
- 额定负重：30-45KG / Load capacity: 30-45KG
- 使用寿命：50000 / Cycling: 50000
- 安装方式：侧面安装 / Installation: Side mount
- 表面处理：高度精抛 / Finish：Highly refined polished
- 主要材质：不锈钢 / Main material：Stainless steel


阻尼缓冲装置 / Damping Soft-closing Device


高级钢珠 / High Quality Steel Ball



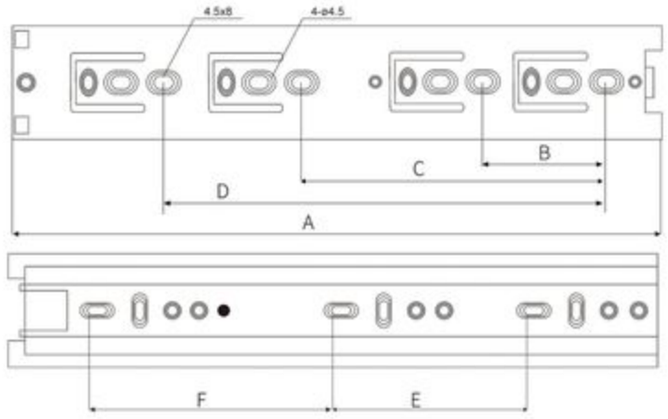



MY-45MM 三折钢珠滑轨 / 3-fold Full Extension Ball Bearing Slide — 单位: mm / unit: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8 Inch	200	35	96			128		
10寸 10 Inch	250	35	64	96	96	64		
12寸 12 Inch	300	35	64	64	128	96		
14寸 14 Inch	350	35	64	96	128	128		
16寸 16 Inch	400	35	64	160	160	160		
18寸 18 Inch	450	35	64	96	192	160		
20寸 20 Inch	500	35	64	128	224	192		
22寸 22 Inch	550	35	64	160	224	224		
24寸 24 Inch	600	35	64	192	256	256		
26寸 26 Inch	650	35	64	224	256	288		

材料厚度 Thickness Range

NO.	❶	❷	❸
A	0.8x0.8x0.8mm		
B	0.9x0.9x0.9mm		
C	1.0x1.0x1.0mm		
D	1.1x1.1x1.1mm		
E	1.2x1.2x1.2mm		
F	1.2x1.2x1.5mm		


45MM 不锈钢缓冲/自弹三节钢珠滑轨
SS Soft Close/Push Open 3-Fold Ball Bearing Drawer Slide


- 滑轨宽度：45mm / Width: 45mm
- 滑轨长度：200-650mm / Length: 200-650mm
- 材料厚度：0.9&1.0mm / Material thickness：0.9&1.0mm
- 额定负重：30KG / Load capacity: 30KG
- 使用寿命：50000 / Cycling: 50000
- 安装方式：侧面安装 / Installation: Side mount
- 表面处理：高度精抛 / Finish：Highly refined polished
- 主要材质：不锈钢 / Main material：Stainless steel


阻尼缓冲装置 / Damping Soft-closing Device


高级钢珠 / High Quality Steel Ball



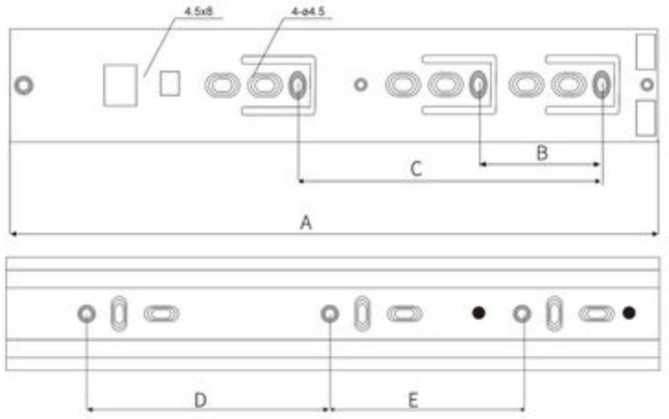



MY-45MM 三折钢珠滑轨 / 3-fold Full Extension Ball Bearing Slide — 单位: mm / unit: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8 Inch	200	35	96			128		
10寸 10 Inch	250	35	64	96	96	64		
12寸 12 Inch	300	35	64	64	128	96		
14寸 14 Inch	350	35	64	96	128	128		
16寸 16 Inch	400	35	64	160	160	160		
18寸 18 Inch	450	35	64	96	192	160		
20寸 20 Inch	500	35	64	128	224	192		
22寸 22 Inch	550	35	64	160	224	224		
24寸 24 Inch	600	35	64	192	256	256		
26寸 26 Inch	650	35	64	224	256	288		

材料厚度 Thickness Range

NO.	❶	❷	❸
A	0.9x0.9x0.9mm		
B	1.0x1.0x1.0mm		


隐藏式 二节缓冲隐藏滑轨
2-fold Soft Close Hidden Drawer Slide

- 滑轨类型：2节缓冲
  Slide rail type: 2-fold Soft Close
- 材料厚度：1.0-1.4mm
  Material thickness: 1.0-1.4mm
- 额定负重：25kg
  Load capacity: 25kg
- 使用寿命：50000
  Cycling: 50000
- 安装方式：底部安装
  Installation: Under mount
- 表面处理：镀锌/镀黑
  Finish: Zinc/Black
- 主要材质：冷轧钢
  Main material: Cold-rolled steel plate


1D把手
1D handle


插销
latch



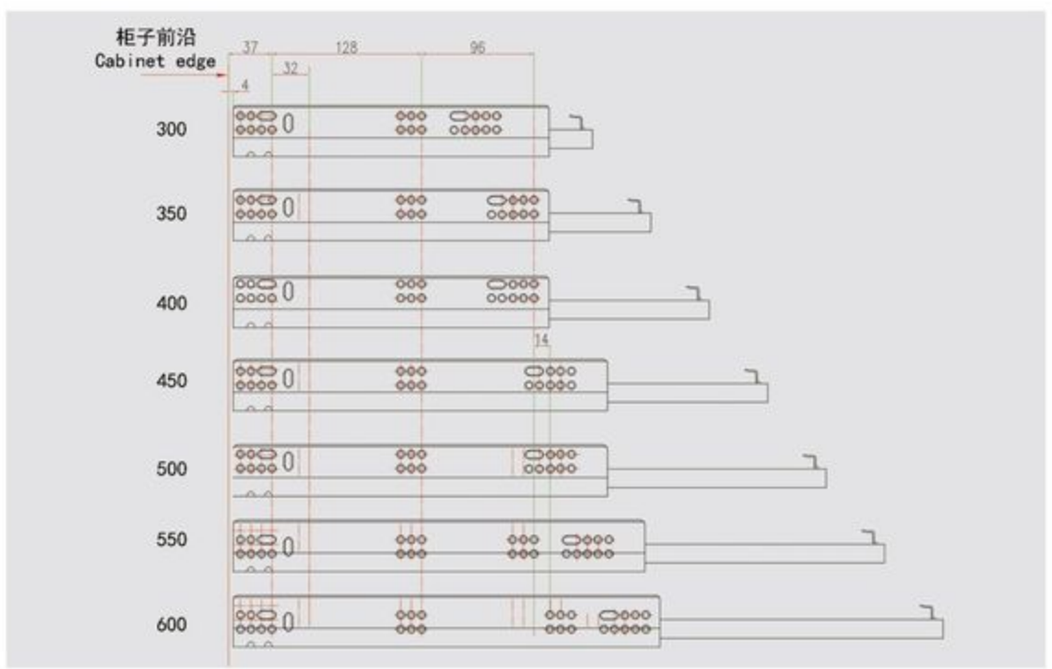


隐藏式 二节反弹隐藏滑轨
2-fold Push Open Hidden Drawer Slide

- 滑轨类型：2节反弹
  Slide rail type: 2-fold Push Open
- 材料厚度：1.0-1.4mm
  Material thickness: 1.0-1.4mm
- 额定负重：25kg
  Load capacity: 25kg
- 使用寿命：50000
  Cycling: 50000
- 安装方式：底部安装
  Installation: Under mount
- 表面处理：镀锌/镀黑
  Finish: Zinc/Black
- 主要材质：冷轧钢
  Main material: Cold-rolled steel plate


1D把手
1D handle


插销
latch



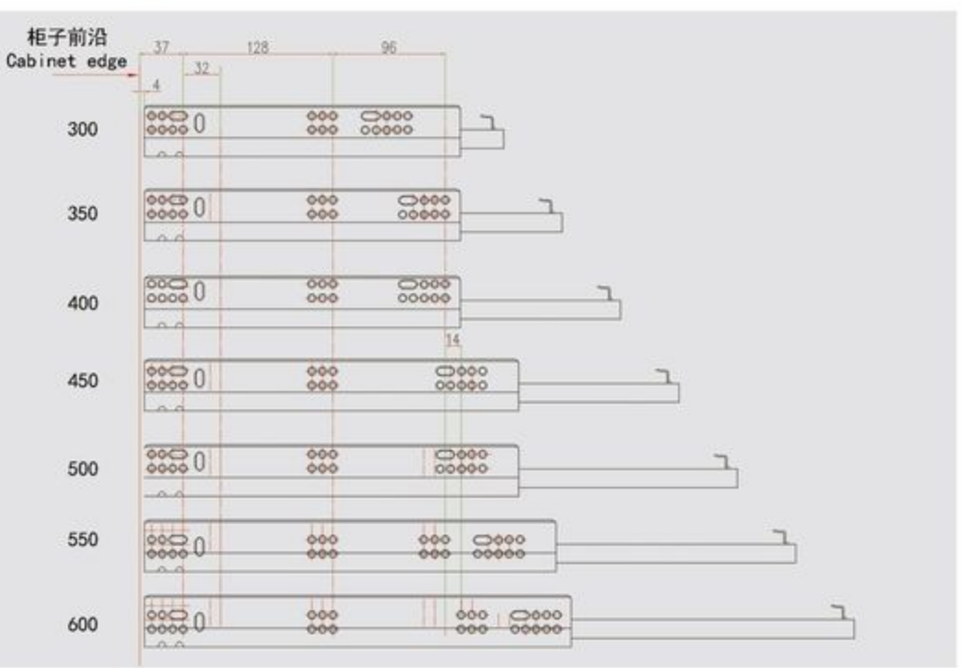

隐藏式 三节缓冲隐藏滑轨
3-fold Soft Close Hidden Drawer Slide


- 滑轨类型：3节缓冲
  Slide rail type: 3-fold Soft Close
- 材料厚度：1.8*1.5*1.0mm
  Material thickness: 1.8*1.5*1.0mm
- 额定负重：35kg
  Load capacity: 35kg
- 使用寿命：50000
  Cycling: 50000
- 安装方式：底部安装
  Installation: Under mount
- 表面处理：镀锌/镀黑
  Finish: Zinc/Black
- 主要材质：冷轧钢
  Main material: Cold-rolled steel plate


1D把手
1D handle


3D把手
3D handle


插销
latch



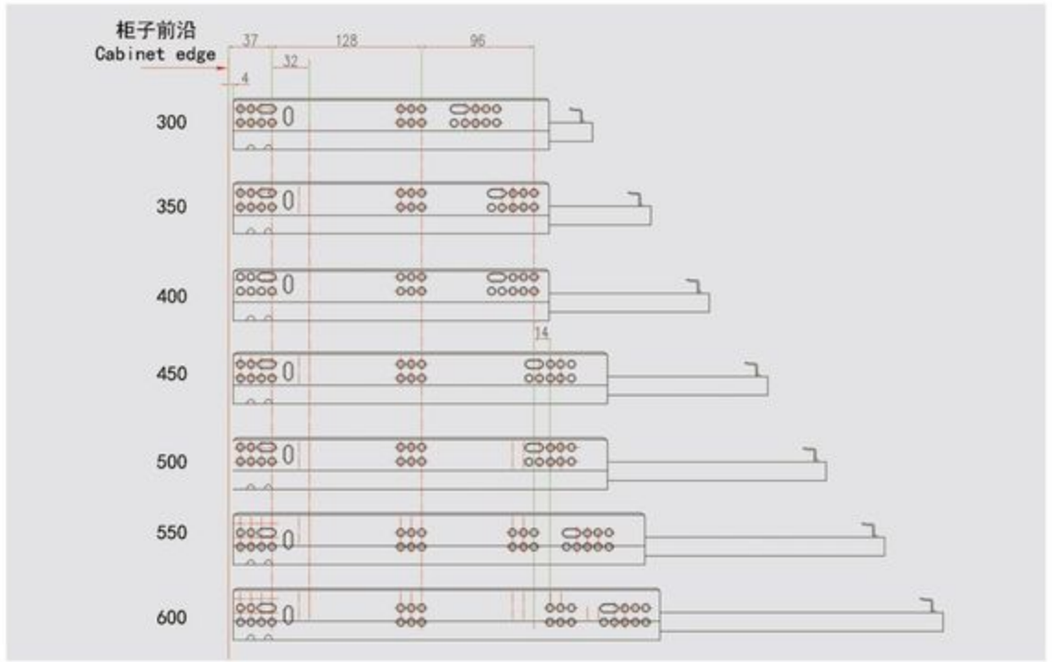

隐藏式 三节反弹隐藏滑轨
3-fold Push Hidden Drawer Slide


- 滑轨类型：3节反弹
  Slide rail type: 3-fold Push Open
- 材料厚度：1.8*1.5*1.0mm
  Material thickness: 1.8*1.5*1.0mm
- 额定负重：35kg
  Load capacity: 35kg
- 使用寿命：50000
  Cycling: 50000
- 安装方式：底部安装
  Installation: Under mount
- 表面处理：镀锌/镀黑
  Finish: Zinc/Black
- 主要材质：冷轧钢
  Main material: Cold-rolled steel plate


1D把手
1D handle


3D把手
3D handle


插销
latch



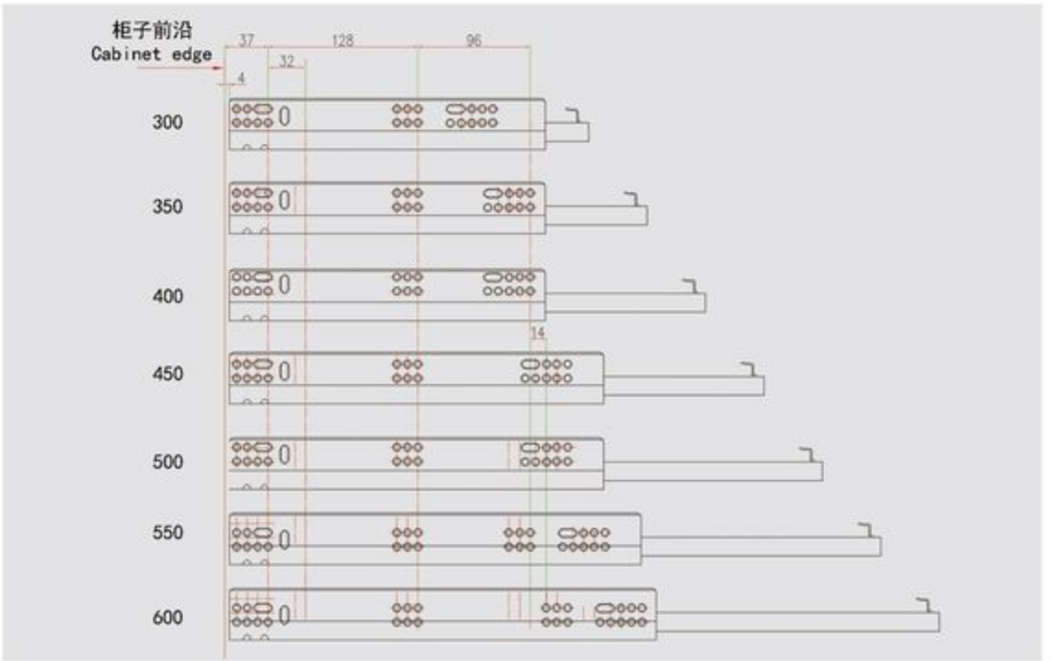



Gas springs 气撑

- 主要材质:铁+阻尼塑胶或铜+阻尼塑胶
Material: Iron + damping plastic or copper + damping plastic
- 表面处理:银灰色/黑色/白色
Surface treatment: silver grey / Black / white
- 适用范围:橱柜的上翻木门和铝框门
Scope of application: upturned wooden doors and aluminum frame doors of cabinets
- 主要功能:支撑橱柜门板
Main function: supporting cabinet door panel
- 产品特性:气撑长度-6"8"10"12"
Product characteristics: air support length -6"8" 10"12"
- 气管尺寸:15x1.0mm;杆直径:6.0mm
Gas pipe size: 15x1.0mm;Rod diameter: 6.0mm
- 举力规格有50N,60N,80N,100N,120N,150N,180N.200N.250N
Lifting force specifications include 5ON,6ON,80N,100N,120N,150n, 180n.200N.250N


标准配件
Standard accessorles:




产品参数
Dimension parameters:



上翻 Up Lifting

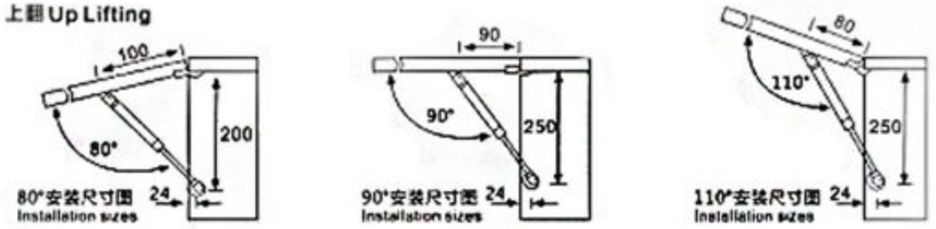


下翻 Down Lifting

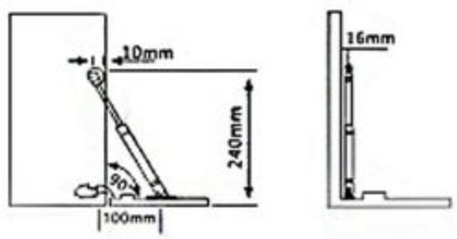




Tandem Box 骑马抽

- 主要材质: 铁
Main material: Iron
- 颜色: 灰色/白色
Color: Grey/White
- 高度: H88mm/H120mm/H152mm/H184mm(超薄版)
H90mm/H160mm/H200mm(豪华版)
Height: H88mm/H120mm/H152mm/H184mm(Slim tandem box)
H90mm/H160mm/H200mm(Luxury tandem box)
- 尺寸: 300mm-550mm
Size: 300mm-550mm

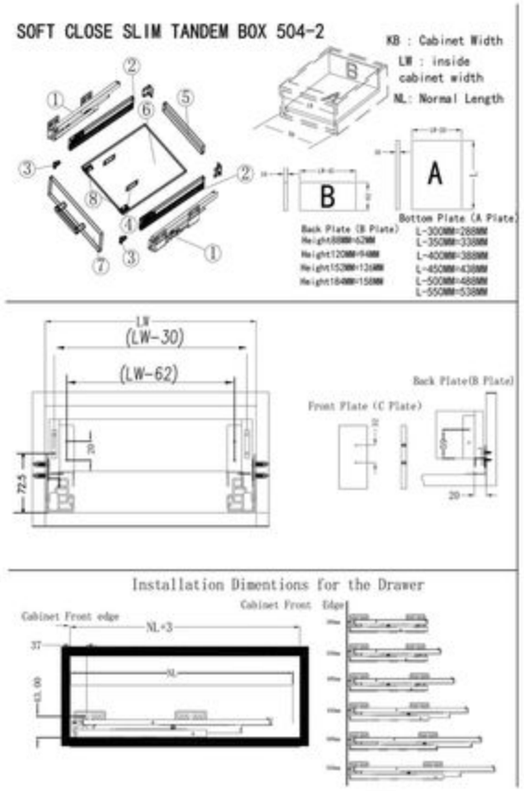

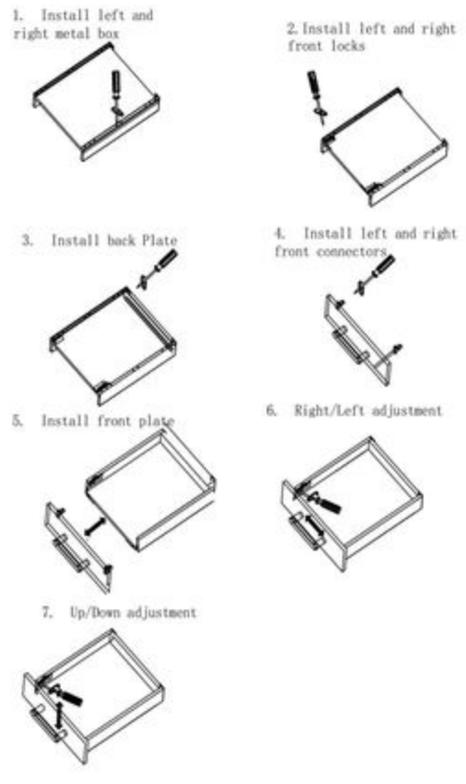


FGV 二节喷粉滑轨
2-Fold Powder Coated Drawer Slide

- 滑轨长度：250-600mm
  Length: 250-600mm
- 材料厚度：0.7&0.8&0.9&1.0&1.1mm
  Material thickness: 0.7&0.8&0.9&1.0&1.1mm
- 使用寿命：50000
  Cycling: 50000
- 安装方式：侧面安装
  Installation: Side mount
- 表面处理：白色/黑色/棕色喷漆
  Finish: White/Black/Brown powder coated
- 主要材质：冷轧钢
  Main material: Cold-rolled steel plate


坚固滑轮
Durable and practical



白色喷漆
White paint does not rust



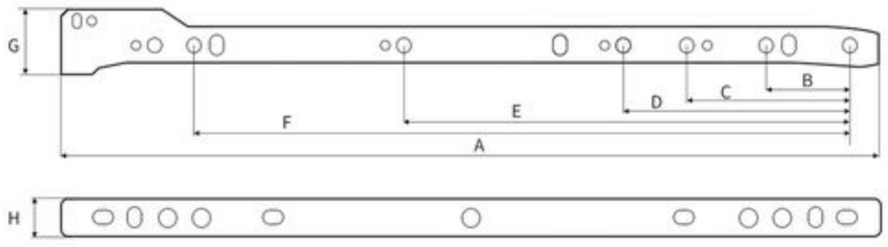

ZH-3008 三折钢珠滑轨
3-Fold Full Extension Ball Bearing Slide
单位: mm
unit: mm

SIZE	A	B	C	D	E	F	G	H
10"(250mm)	300	65	129	194	96	224	297	
12"(300mm)	350	65	193	258	128	256	347	
14"(350mm)	400	65	225	290	160	320	397	
16"(400mm)	450	65	257	322	160	352	447	
18"(450mm)	500	65	321	386	192	416	497	
20"(500mm)								
22"(550mm)								
24"(600mm)								



Packaging
Support for customization


In bulk packing


Transparent polybag



Color polybag


Color inner box


Small color box


Shrinking packing


Container loading

